
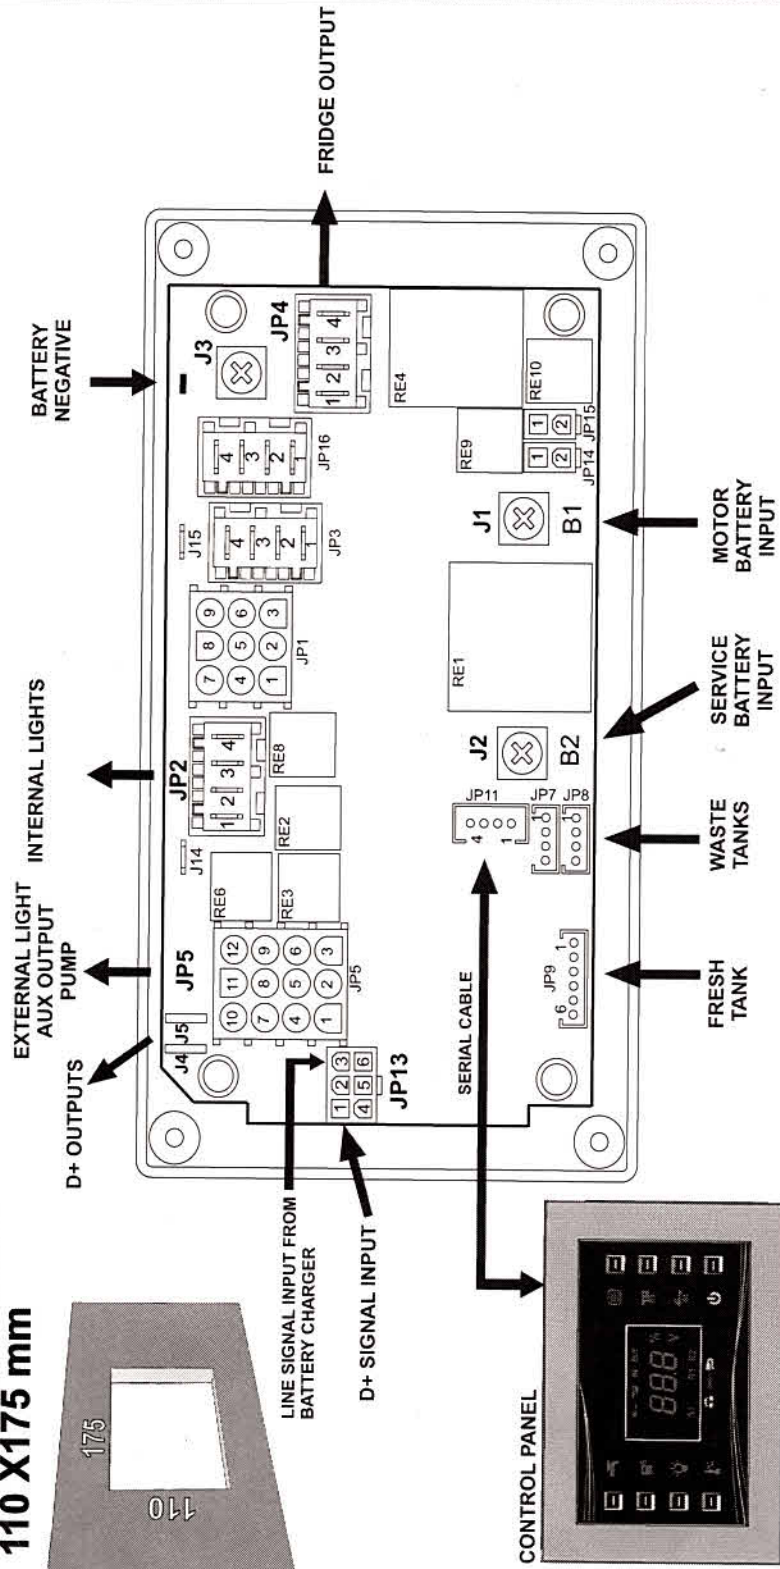


NEW HOLE DIMENSIONS PANEL NE274:

110 X 175 mm



CAUTION: BEFORE PERFORMING MANEUVER ON THE SYSTEM, MAKE SURE TO EXCLUDE ANY POWER SOURCE INCLUDING SERVICE BATTERY, MOTOR BATTERY AND SOLAR PANELS.




FIG. 2




FIG. 1


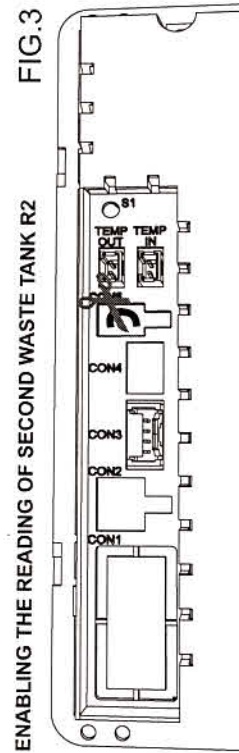


FIG. 3

MOUNTING NOTES:



- ALL CONNECTIONS MUST BE REDONE FOLLOWING THE MANUAL COMBINED;
- THE BATTERY POWER INPUTS AND THE NEGATIVE ARE ON THE SCREWS TO ENSURE GREATER RELIABILITY IN THE CONNECTIONS;
- PLEASE REFER TO THE COMBINED MANUAL FOR ALL THE ADDITIONAL FUNCTIONS OF THE NEW SYSTEM;
- IF THE RECOVERY TANK IS 1-LEVEL TYPE (FULL), EXECUTE THE CONNECTION AS FIG. 1;
- IF THE RECOVERY TANK IS 3-LEVEL TYPE (3/3), EXECUTE THE CONNECTION AS FIG. 2;
- IF THE SYSTEM IS EQUIPPED WITH THE SECOND WASTE TANK R2, IT IS POSSIBLE TO ENABLE THE READING BY CUTTING THE BRIDGE BEHIND THE CONTROL PANEL (FIG. 3);
- THE NEW SYSTEM IS EQUIPPED WITH A COUPLER RELAY THAT ALLOWS THE RECHARGE OF THE SERVICE BATTERY WITH ALTERNATOR AND CHARGE ENGINE BATTERY WITH BATTERY CHARGER.

NORDELETRONICA
 Viale delle Industrie 6A - ITALY
 31018 Z.I. ALBINA DI GAIARINE (TV)
 Tel. +39 0434 759420
 www.nordelettronica.it

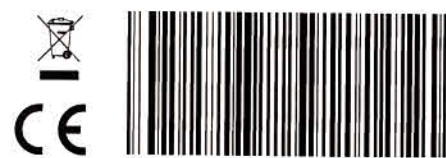


DIMENSIONI FORO NUOVO PANNELLO NEZ74:

110 X 175 mm

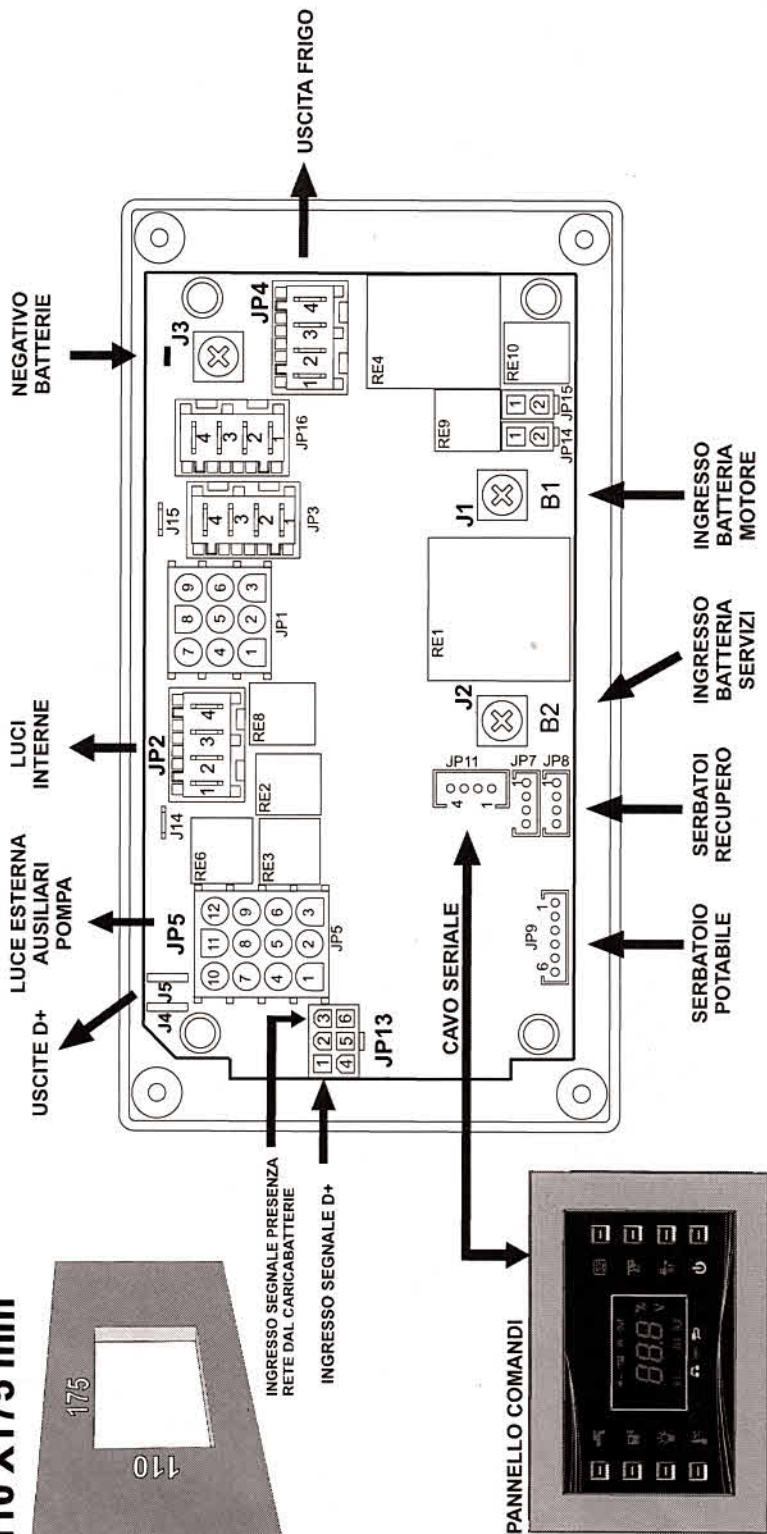

ATTENZIONE: PRIMA DI EFFETTUARE MANOVRE SULL'IMPIANTO, ASSICURARSI DI ESCLUDERE QUALSIASI FONTE DI ALIMENTAZIONE TRA CUI BATTERIA SERVIZI, BATTERIA MOTORE E PANNELLI SOLARI.

ABILITAZIONE LETTURA SECONDO SERBATOIO DI RECUPERO R2 FIG.3

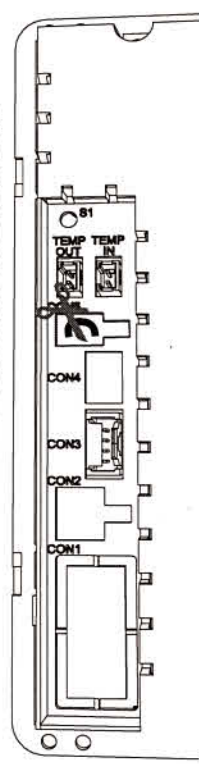

CONNESSIONE SERBATOIO RECUPERO:

FIG.1


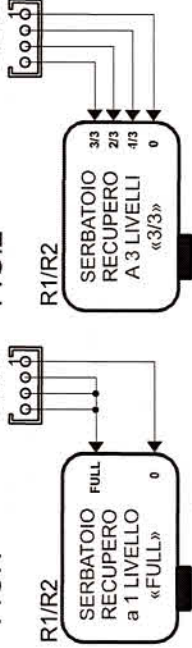


FIG.2

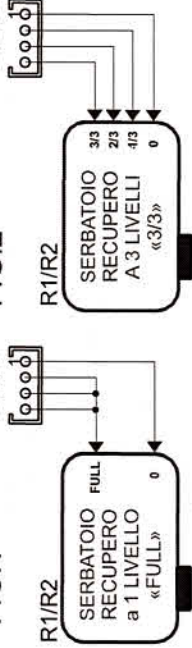

NOTE PER IL MONTAGGIO:

- TUTTE LE CONNESSIONI DEVONO ESSERE RIFATTE SEGUENDO IL MANUALE IN ABBINATO;
- GLI INGRESSI DI POTENZA DELLE BATTERIE E IL NEGATIVO SONO SULLE VITI PER GARANTIRE UNA MAGGIORE AFFIDABILITÀ NELLA CONNESSIONE;
- SI PREGA DI CONSULTARE IL MANUALE ABBINATO PER TUTTE LE FUNZIONALITÀ AGGIUNTE DEL NUOVO SISTEMA;
- SE IL SERBATOIO DI RECUPERO È DEL TIPO 1 LIVELLO (FULL) ESEGUIRE I COLLEGAMENTI COME FIGURA 1;
- SE IL SERBATOIO DI RECUPERO È DEL TIPO 3 LIVELLI (3/3) ESEGUIRE I COLLEGAMENTI COME FIGURA 2;
- SE IL SISTEMA È DOTATO DEL SECONDO SERBATOIO R2 È POSSIBILE ABILITARE LA LETTURA TAGLIANDO IL PONTICELLO SUL PANNELLO COMANDI (FIG. 3);
- IL NUOVO SISTEMA È DOTATO DI RELE ACCOPPIATORE CHE PERMETTE LA RICARICA DELLA BATTERIA SERVIZI A VEICOLO IN MOTO E LA RICARICA DELLA BATTERIA MOTORE CON IL CARICABATTERIE.

NORDELETRONICA
 Viale delle Industrie 6A - ITALY
 31018 Z.I. ALBINA DI GAIARINE (TV)
 Tel.+39 0434 759420
 www.nordeletronica.it

